



PCT/GB 2004 / 0 0 4 2 0.3

REC'D 11 NOV 2004	
WIPO	PCT



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

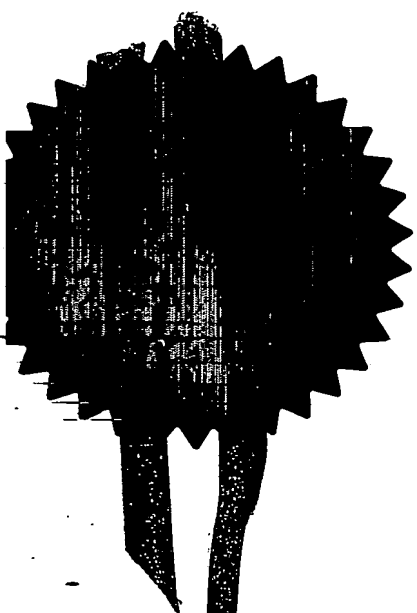


Signed


Dated 21 October 2004

BEST AVAILABLE COPY

Patents Act 1977  
(Rule 16)



06 OCT 03 142224-4 000346  
P01/7700 0:00 03232667



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference	GW-G34169		
2. Patent application number (The Patent Office will fill in this part)	0323266.7		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Stereonics Limited 53 Cornmoor Road Whickham Newcastle-upon-Tyne NE16 4PU		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	England	8068082001	
4. Title of the invention	LCD Viewing System		
5. Name of your agent (if you have one)	Bailey Walsh & Co 5 York Place Leeds LS1 2SD		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)			
Patents ADP number (if you know it)	224001 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s)

Abstract

Drawing(s)

2 + 2 / 6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*G Wood*

03.10.03

12. Name and daytime telephone number of person to contact in the United Kingdom

G Wood  
0113 243 3824

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## LCD Viewing System

The invention to which this application relates is an apparatus and a method for assigning and synchronising the viewing of frames of still or moving images, hereinafter referred to as video, which is generated from data and which frames are shown in a pre-designated sequence, typically for the viewing of Stereo 3D images.

The use of the display of frames of alternating right and left hand images of video on a single display screen viewed with a set of LCD shutter glasses to generate the appearance of a 3-dimensional image, is well known. The video can be moving images or still but, in any case, the single display screen is controlled to show a sequence of image frames. The normal sequence of display for viewing images with LCD shutter glasses is to show alternating right and left-hand image frames of a stereo pair with a typical frame rate of 25 or 30 frames per second of each right or left image.

The use of LCD shutter viewing glasses to view 3-D images is well known and these types of glasses are typically known as shutter glasses. This means that with the display screen showing alternating right and left-hand images of a stereo pair, the shutter glasses can be provided with shutters for the left and right eye viewing structures of the glasses with the shutters being activated with the aim of activating the left eye shutter when the right image is displayed such that the right eye only ever sees the right image and activating the right eye shutter when the left image is displayed such that the left eye only ever sees the left image.

One known form of providing shutters is to make the left and right frames of the glasses LCD screens and then activating the

LCD screen such that the film of the LCD becomes opaque, hence acting as a shutter. The particular type of LCD film, which is typically laminated between two sheets of a transparent medium, can be selected to become substantially opaque when activated and therefore act as a total shutter.

In order to activate the LCD mechanism to become a shutter, a voltage is typically applied to the LCD film and the control of the voltage is required to be in sequence to activate the LCD between the left and right-hand viewing structures of the glasses as appropriate. Known methods of controlling the sequential application of the voltage are to provide a trigger mechanism which include wire, RF or IR links to the display screen, or its related image generator typical of which is a personal computer, on which the right and left-hand video images are being displayed. However, these trigger methods, can be bulky when produced on the glasses and can lead to the activation of the LCD screens, becoming out of sequence with the display of the left and right video images on the display screen. Once out of sequence, the desired result is not achieved for the person viewing the 3D images and therefore the apparatus as a whole is deemed not to be working in the desired manner. Furthermore additional hardware needs to be provided to the image generator in order to generate the triggering signal.

In a first aspect of the invention, there is provided an apparatus for viewing a video display on a display screen which comprises the sequential display of right and left images of a video stereo pair, and said viewing device including first and second, spaced, viewing structures, and said apparatus is provided to be worn such that a first viewing structure is positioned in front of the viewer's left eye and a second viewing structure is positioned in front of the viewer's right eye with the viewer being required to look through the structures to view the video display, each

structure provided with a construction being operable to change between a viewing condition and a masking condition and wherein at least one of the images in the sequence of video images which are displayed on the display is of a predefined format which can be detected for synchronisation of the viewing device with the images on the display screen.

In one embodiment each viewing structure construction is an LCD mechanism with a screen which is movable between substantially opaque and transparent conditions.

In a further aspect of the invention there is provided apparatus for viewing a sequential display of right and left images of a video stereo pair, said viewing device including first and second, spaced, viewing structures and said device provided to be worn such that a first viewing structure is positioned in front of the viewer's left eye and a second viewing structure is positioned in front of the viewer's right eye with the viewer being required to look through the structures to view the video display, each structure provided with an LCD screen construction with each screen construction being operable to change between a substantially transparent condition and a substantially opaque condition and wherein at least one of the image frames in the sequence of images which are displayed on the display is of a form which can be detected by a sensor of the viewing device for synchronisation of the viewing device operation with the images on the display screen.

In one embodiment the predefined format of the image is substantially black with a predefined marking element. In one embodiment the marking element is one or more white lines.

In one embodiment, the predefined image is generated at time intervals. The predefined images can be generated or inserted at

any time and with any frequency to suit particular viewing requirements.

In one embodiment the predefined image replaces the right or left hand image of an image pair.

In a preferred embodiment, the viewing device which is worn on the person, includes an optical sensor, or an optical sensor is connected thereto, and said optical sensor is provided to detect the display of the said predefined image.

Typically the optical sensor is housed in a manner such that, when the person wearing the device is viewing the display screen, the optical sensor will automatically be positioned so as to directly face the same display screen. This ensures that the accurate detection of the predefined image in the video display is achieved.

In one embodiment, the optical sensor includes a lens or other mechanism which acts to focus or direct the light generated by the display screen onto the optical sensor and/or reduce the field of view of the optical sensor to eliminate or reduce the possibility of adverse light effects provided from any other light sources.

Typically, the data from the optical sensor is processed to provide a control signal generated whenever a predefined image is detected on the display screen.

The control signal is used to identify a right or left image, depending on whether a right or left image is known to appear after the predefined image. The ability to identify positively that a right or left image is displayed at the particular time, allows the operation of the viewing device to be checked to

ensure that the activation of the appropriate LCD mechanism shutter for the right or left viewing structure, is synchronised with the display of the right or left image frames.

In one embodiment the predefined image is generated in such a manner as to be consciously invisible to the majority of users.

In one embodiment the output of the optical sensor is used to determine the display rate of each successive video frame and using this output control the activation timing and frequency of the LCD shutter.

In one embodiment the electronic circuits associated with processing the signal output will act in a predictive and self-correcting manner to determine the activation timing and frequency of the LCD shutter.

For example, if over time, there is a drift in the operation of the LCD mechanism in comparison with the display of the video image frames, the generation of the predefined image, and detection of the same, allows the operation of the right and left LCD mechanisms to be brought back into synchronicity with the display of the right and left images. Furthermore, in addition to bringing the operation of the LCD mechanisms back into synchronicity for right and left hand images the control system for the viewing device can also be used to determine the ongoing requirement for speed of operation of the right and left LCD mechanisms and the length of activation.

Typically the operation of the viewing apparatus can be controlled to switch as required between registration on the display of a right-hand video image or left-hand video image.



Typically the operation of the viewing apparatus can be micro-controlled to adjust for variations in the speed of reaction or otherwise of the control signal to the displayed frames so as to bring the operation of the timing of the open and closed times of the shutters into exact time and/or phase of the frames on the viewing display.

The specific embodiment of the invention will now be described with reference to the accompany drawings, wherein:-

Figure 1 illustrates a front elevation of the viewing device;

Figure 2 illustrates a plan view of the viewing device according to Figure 1 in the first embodiment;

Figure 3 illustrates the apparatus of the system as a whole; and

Figure 4 illustrates one example of an image which can be used as a reference in accordance with the invention.

One embodiment of the invention is now described with reference to the accompanying drawings and, in particular, starting with Figure 3, there is illustrated the apparatus and system in accordance with one embodiment of the invention. The apparatus comprises a display screen 2 on which the video images 4 are displayed to the user. The video images can be generated by processing means provided in connection with the display screen such as for example by a television or monitor or alternatively, can be generated by apparatus remote to the display screen and projected onto the screen such as for example in a cinema, projection television systems or the like.

In whichever embodiment, the video images are provided on the screen, the viewing procedure is the same in that a viewer of the

display screen is provided with a viewing device 6. The viewing device is described in more detail in Figures 1 and 2 but basically allows the viewing of left and right stereo pairs of images displayed on the display screen to provide a 3-dimensional effect to be created for a viewer wearing the viewing device.

The viewing device is described in more detail in Figures 1 and 2 and can be seen to comprise arms 8, typically to be worn at the free ends 10, on the ears. The front face 12 has a bridge portion 14 to be worn at the nose and first and second viewing structures, 16, 18 each of said structures spaced apart from the other and positioned so as to be positioned in front of one of the eyes of the viewer when wearing the device thereby providing a right viewing aperture 20 and left viewing aperture 22. The apertures in each of the viewing structures, are fitted with an LCD display mechanism, said LCD display configuration can be of any conventional form and typically comprises front and rear layers of glass, plastic or other suitable transparent material and, disposed between said layers, an LCD film. Electrical contact means to the LCD display mechanisms allow the activation and control of the same. The LCD display conditions are changeable between substantially transparent and substantially opaque conditions as seen in Figure 3 where the right structure 20 is opaque and the left hand structure 22 is transparent. The application of a voltage to the LCD display typically causes the same to move to the substantially opaque condition and, when in that condition, the viewer's eye at that particular viewing structure, cannot see through the same such that only the other eye looking through the other viewing structure which is in a substantially transparent condition can see the image on the video display. Thus, it will be apparent to the reader that at any given time, it is the case that one of the LCD viewing structures is substantially transparent and the

other is substantially opaque such that when viewing the video display, the viewer can only view the same with one of their eyes. This is an important feature of the invention and needs to be linked to the viewing of the video images.

The video display is provided by a series of frames of video shown in rapid succession. In order to generate the 3-dimensional view, the frames are shown in a known predefined format such as alternate right and left frames or alternatively the frames are shown at twice the normal rate and two right hand frames are followed by two left hand frames and so on, in sequence. The right hand video images need to be viewed by the viewer's right eye, and the left hand video images need to be viewed by the viewer's left eye and therefore the sequential operation of the viewing structures 16, 18 needs to be in synchronisation with the left and right hand images being shown on the video display.

This can be achieved, initially, as soon as the first predefined frame is detected by the viewing apparatus.

In accordance with the present invention there is provided a means whereby the loss of synchronicity can be avoided or, at least, detected quickly. This is achieved by providing, in the embodiment in the viewing device, at least one optical sensor 24 typically mounted in the arm of the glasses. A tube of appropriate dimensions to the viewing conditions can be used to give a narrow field of view to the sensor. The sensor is connected to control means for operation of the LCD mechanisms either by wire (not shown) or remotely. The optical sensor is mounted on the viewing device 6 such that when the viewing device is being used to look at the video display, the optical sensor is also directed towards the said video display. In conjunction with this, the sequence of video image frames which

are generated, include, at spaced intervals, a predefined image 26 which is of a known format in this case as shown in Figure 4 a substantially blank screen with two "white" lines 28. The said predefined image frame can be displayed at a particular frequency such as, for example, a said predefined image frame is displayed every 25 or more frames of either the right or left hand image. The image selected to be displayed is chosen so as to be distinguishable by the optical sensor and, upon the display of that image frame, and the detection of the same by the sensor, the control means for the viewing device will know which particular viewing configuration the viewing device should be in, i.e. which viewing structure should be transparent and which structure should be opaque. The control means will then check the condition or timing synchronisation of the viewing device with the individual frame on the display screen and, if in the required synchronisation, no further action will be taken. However, if the synchronisation is not what it should be when the predefined image is displayed and detected, a suitable alteration to the viewing structure control will be made. In one embodiment an adjustment mechanism is provided to allow small adjustments to the phase of the LCD screens activations. The same mechanism or a further mechanism can be provided to switch completely the synchronisation between the LCD screens of the left and right viewing structures. Furthermore, the control means can also calculate suitable adjustments to the operation for each of the viewing structure LCD mechanism so as to maintain synchronicity thereafter.

It should be appreciated that the control elements of this invention can be utilised successfully with other forms of viewing structures in the device which do not utilise the LCD mechanisms described herein.

The present invention therefore provides an effective viewing device and viewing system for 3-dimensional video image displays and which ensures that synchronicity between the viewing device and the video images is maintained without the requirement of wired, IR or RF links to the display or its associated components.

The device and system in accordance with the invention therefore provide many benefits, including low cost of manufacture, relatively low power demands and lightweight for ease of use. From a technical viewpoint the ability for synchronisation allows the viewing device to cope with poorly edited video source material where the right and left hand images are out of sequence., particularly after multiple edit sessions. Furthermore as there are no connections and no particular distance constraints, the range of use of the viewing device is significantly greater than the conventional devices.

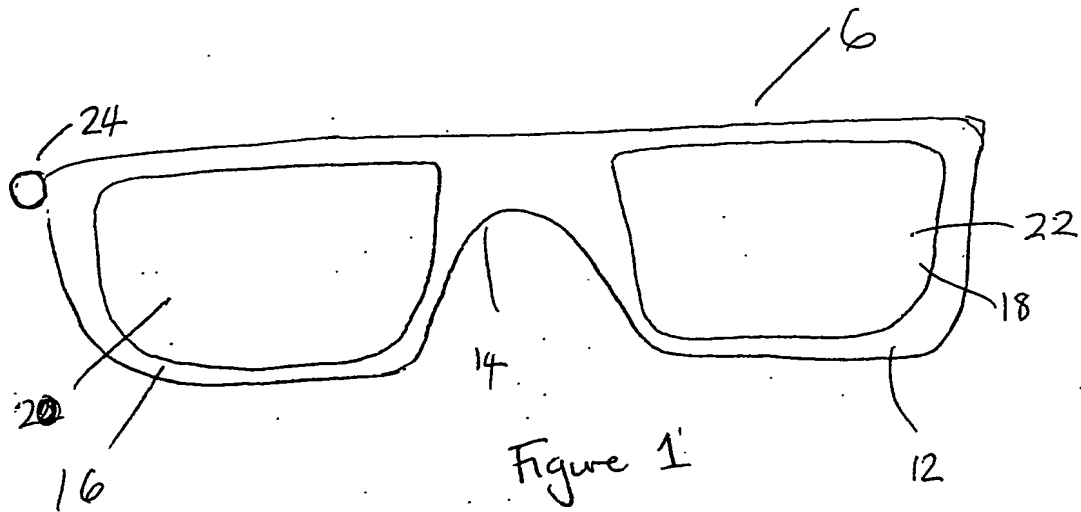


Figure 1

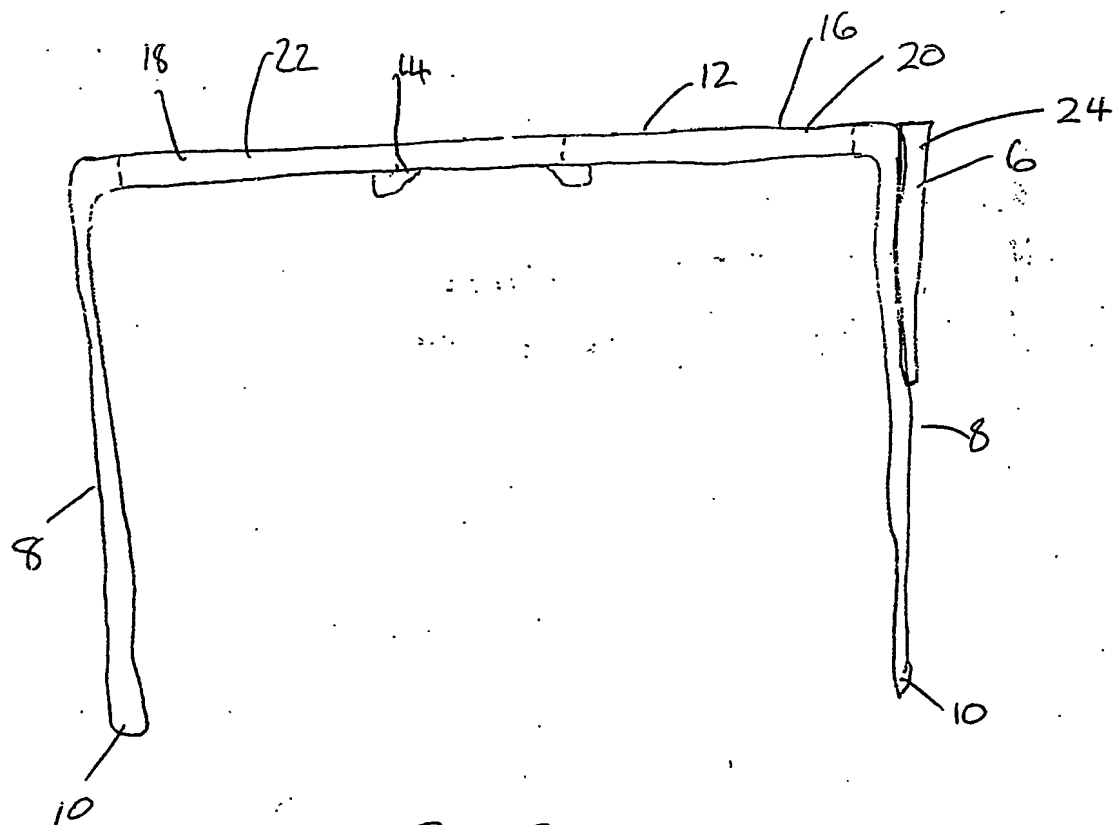


Figure 2

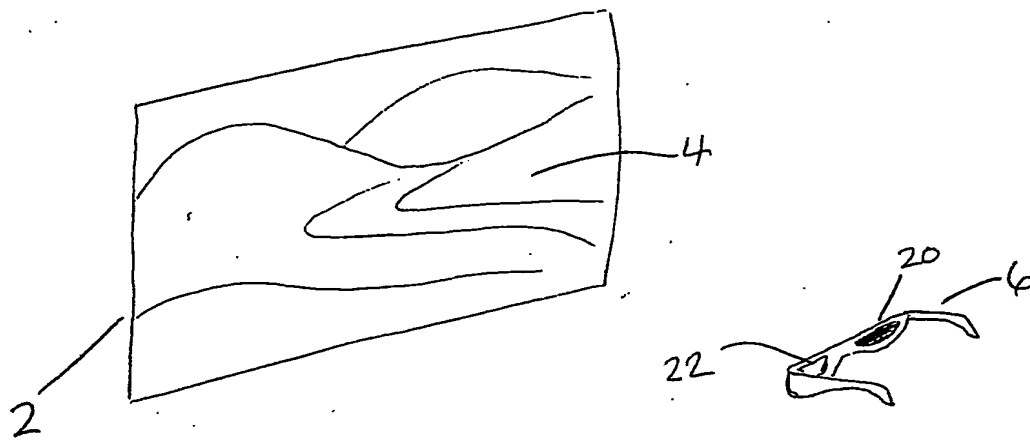


Figure 3.

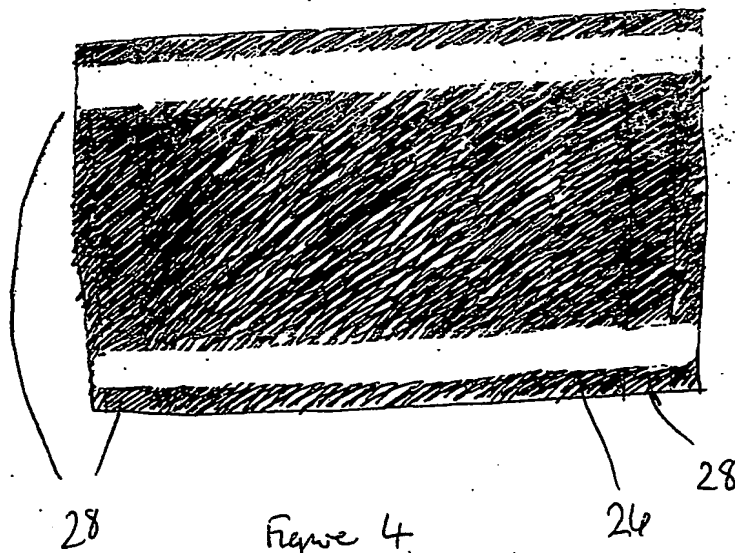


Figure 4

**PCT/GB2004/004203**





**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**